



One product, endless applications. Create floor, wall and window graphics with one universal media ... Trifecta™.

Trifecta™

6 mil semi-rigid matte white textured facestock rated for <5 years of outdoor use

High opacity film with an excellent white point

Universal removable adhesive that will cleanly remove from indoor and outdoor applications for <6 months

Stable 90# layflat polycoated paper liner for ease of printing and installation

Print Compatibility: Eco-Solvent, True Solvent, Latex, UV Wide Format, Screen, UV Offset

When to use Trifecta

One-Step Floor Graphics - Create UL 410 slip resistant floor graphics in one easy step ... no overlamine required. Easy to install and remove. Trifecta™ is suitable for indoor short term floor graphics (<6 months). **Not intended for outdoor floor graphic applications.*

Wall Graphics - Hassle free textured wall decals - peel, stick, done. No need for tapes, tacks or nails and will remove cleanly from painted dry wall.

Window Graphics - Enhance the look of standard window graphics with a dimensional, textured finish. Perfect for short term decorative window decals smaller than 2' x 2'.

Applications

- One-Step Floor Graphics
- Wall Graphics
- Window Signage
- Social Distancing Floor Graphics
- Counter Mats
- Posters
- Wall Décor
- Wayward Signage
- Directional Arrows
- One-Way Window Graphics
- Floor Advertisement
- Point-of-Purchase Signage






STOCKED PRODUCTS ▶

Wide Format	Finish/Color	SKU #	Size	Thickness	Adhesive	Liner	Rolls/Carton
	Textured Matte White	SPMTRI54100	54" x 100 ft	6 mil	Universal Removable	90# Layflat	1

Easy to apply and remove from these surfaces:

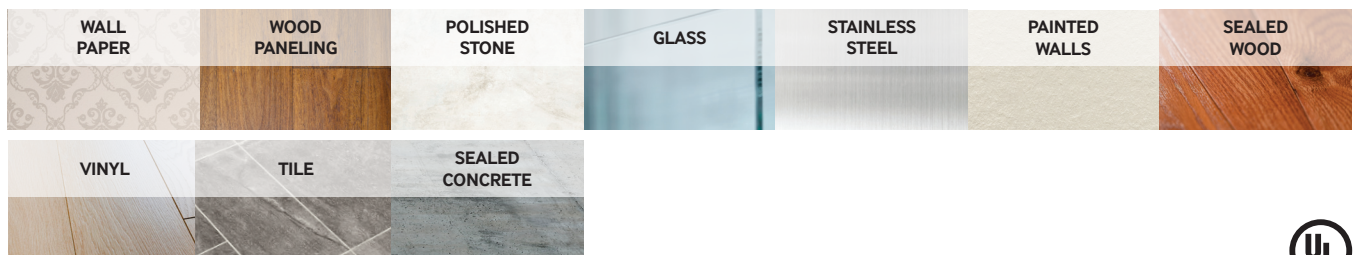



CUSTOM SIZE OFFERING ▶

Finish/Color	SKU #	Size (width)	Film Thickness	Adhesive	Liner	Wgt/MSI
Non Top Coated - UV Offset, Screen						
Textured Matte White	TRIFECTA	54"	6 mil	Universal Removable	90# Layflat	.64#

Custom Size Offering: Custom converted sheet and roll options available to meet your specific requirements.





TECHNICAL DATA ▶

Physical Properties		Trifecta™
Finish		Textured
Color		White
Adhesive		Universal Removable - UR1
Film		Calendered Vinyl
Liner		90# Layflat
Opacity		95% Minimum
Gloss Level		2% Typical
Thickness	Film	6 ± 0.2 mil
	Film w/ Adhesive	6.7± 0.2 mil
	Total Thickness	13.2±0.4 mil
Adhesion	SS 15 min Room Temp Dwell	16-20 oz/in
	SS 24 hr Room Temp Dwell	23-27 oz/in
Weight	Film w/ Adhesive	265-270 gsm
	Total w/ Liner	410-420 gsm
Slip Resistant Certification		UL 410

Conditions for Use	
Shelf Life	1 year
Clean Removability	Up to 6 months
Outdoor Durability	Up to 5 years
Min Application Temp	40° F (4° C)
Service Temp Range	-20° to 150° F (-29° to 66° C)
Solvent Resistance	Good*
Water Resistance	Excellent

CPSIA Compliant

*Good for most petroleum solvents and lower aliphatic alcohols.
For ultimate solvent resistance, edge sealing is recommended.

The information provided herein is correct to the best of Nekoosa's knowledge, however, should not be construed as specifications. No liability for any errors, facts or opinions are accepted. Customers must satisfy themselves as to the suitability of this product for their application. No responsibility for any loss as a result of any person placing reliance on any material contained herein will be accepted.